
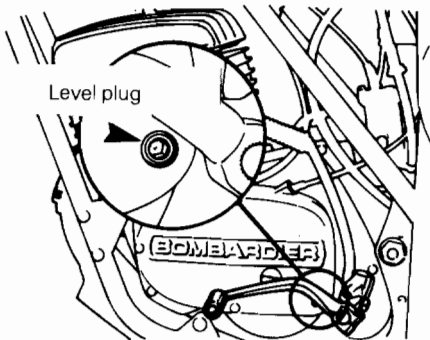


TRANSMISSION OIL

After the engine has been installed in the frame.

Remove the filler/vent plug and refill the transmission with approximately 1200 ml (40 fl. oz.) of SAE 30 motor oil until oil reaches the level orifice.

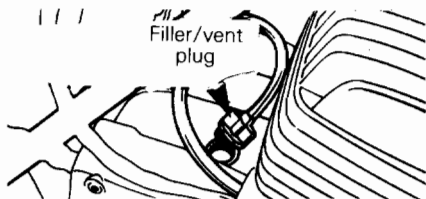

○ **NOTE:** Hold motorcycle upright to check oil level. Replace the level plug, the filler/vent plug and the vent tube.